

4VREt35 300A





P/N R10-36

Voltage	Frequency	Input Power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature	ErP 2013	ErP 2015
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max		
400	50	84	0,21	-	1 850	1 295	57	R	-20°C / +60°C	NA	NA
400	60	91	0,19	-	2 030	1 410	60	R	-20°C / +70°C		
400	50				1088 CFM				-4°F / +140°F		
400	50				1194 CFM				-4°F / +158°F		



dBa : free let out


NA : Not Applicable

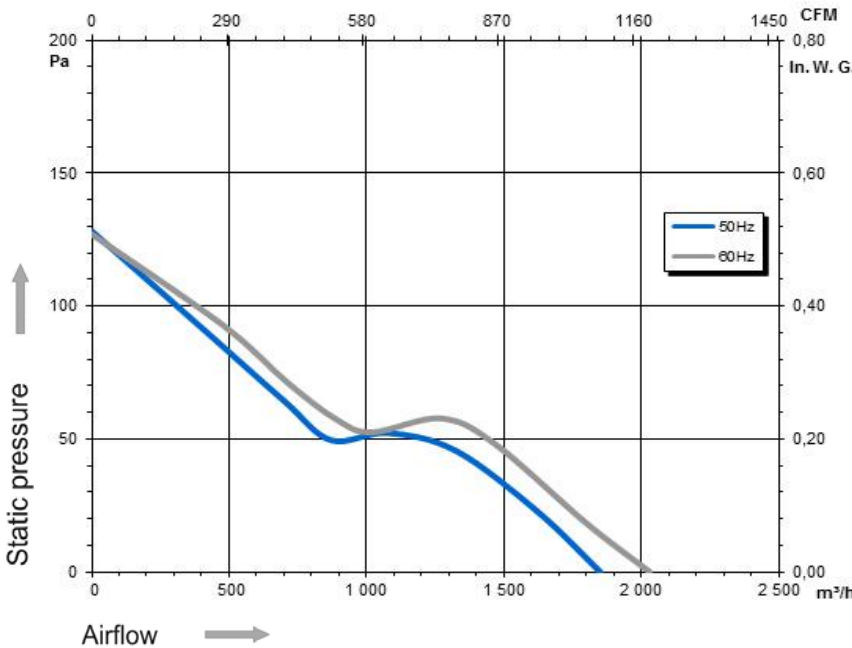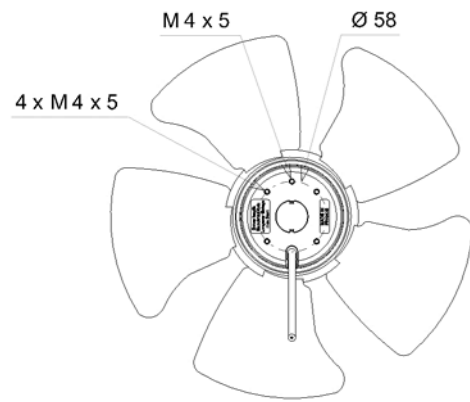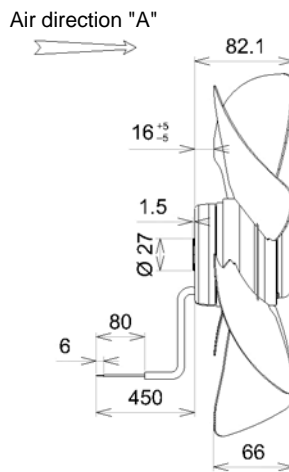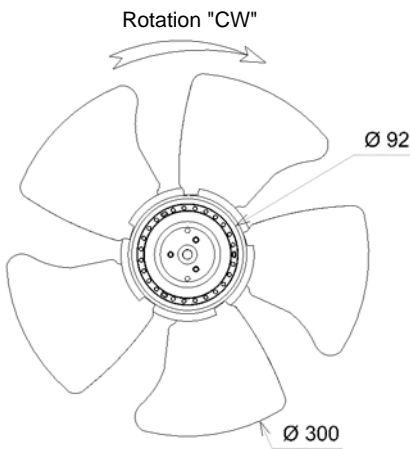

- Weight : 2,5 Kg
- Ball bearing
- Class F winding
- IP44 protection depending on installation and position as per EN60034-5
- G6.3 balancing
- Zinc coated impeller
- Rotor and impeller : black paint



Capacitor for 50Hz	Capacitor for 60Hz	Connecting box	Connector
-	-	39658	09172

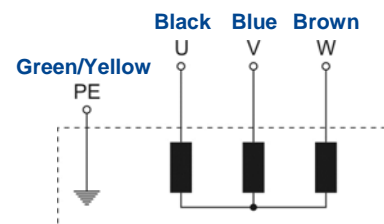

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.